

TOTO®


CST754SFN Whitney™ Two Piece Toilet, 1.6 GPF




CST754SFN - Whitney™ Toilet
SS154 - SoftClose® Traditional Seat



G-Max™ Technology: Quiet, powerful, commercial grade flushing performance.



Choose a SoftClose® toilet seat, or upgrade to a Washlet™.

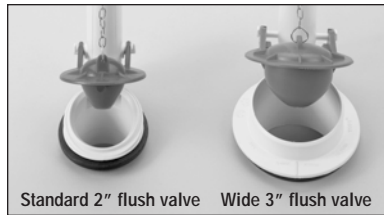

Standard 2" flush valve Wide 3" flush valve
Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.

- Classic design, two piece toilet
- Universal Height 16-1/8" rim height
- G-Max™ Flushing Technology
- Powerful, quiet flush every time
- Large water surface
- Designer Suite:
 Matching Whitney™ pedestal and self-rimming lavatories

Decorative, ADA compliant, high profile two piece toilet. Low consumption (6 Lpf/1.6 Gpf) siphon jet flushing action.

Tank cover, fittings, chrome plated trip lever, less seat.

■ **CST754SFN**
Elongated, 12" rough-in, less seat

□ **C754SF**
Elongated bowl only, 12" rough-in.

□ **ST754S**
Whitney™ tank and cover only. Complete with tank trim and coupling components.

□ **SS154**
SoftClose® Traditional: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

Colors:

Standard #01 Cotton

Optional See price book for additional colors

Trip Lever:

Standard Color Matched

Optional See price book for additional finishes



CST754SFN

Whitney™ Two Piece Toilet, 1.6 GPF

■ PERFORMANCE

The TOTO® G-Max™ low consumption toilets received high ratings during ANSI/ASME and CSA testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

■ SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0 Lpf
 Flush System: Gravity Feed (G-Max System)
 Min. Water Pressure: 8 psi
 Water Surface: 10-3/8" x 8-1/4"
 Trap Diameter: 2-1/8"
 Rough-in: 12" rough-in
 Trapseal: 2-3/8"
 Warranty: Five Year Limited Warranty
 Material: Vitreous china

Shipping Weight: **C754SF** 56.5 lbs.
ST754S 43.0 lbs.

Shipping Dimensions: **C754SF** 29-1/8"L x 11-7/8"W1
 x 15"W2 x 17-3/8"H
ST754S 23-1/4"L x 9-5/8"W
 x 20-7/8"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.


Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others



Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor.

Recommended seat: SS154

These dimensions and specifications are subject to change without notice.

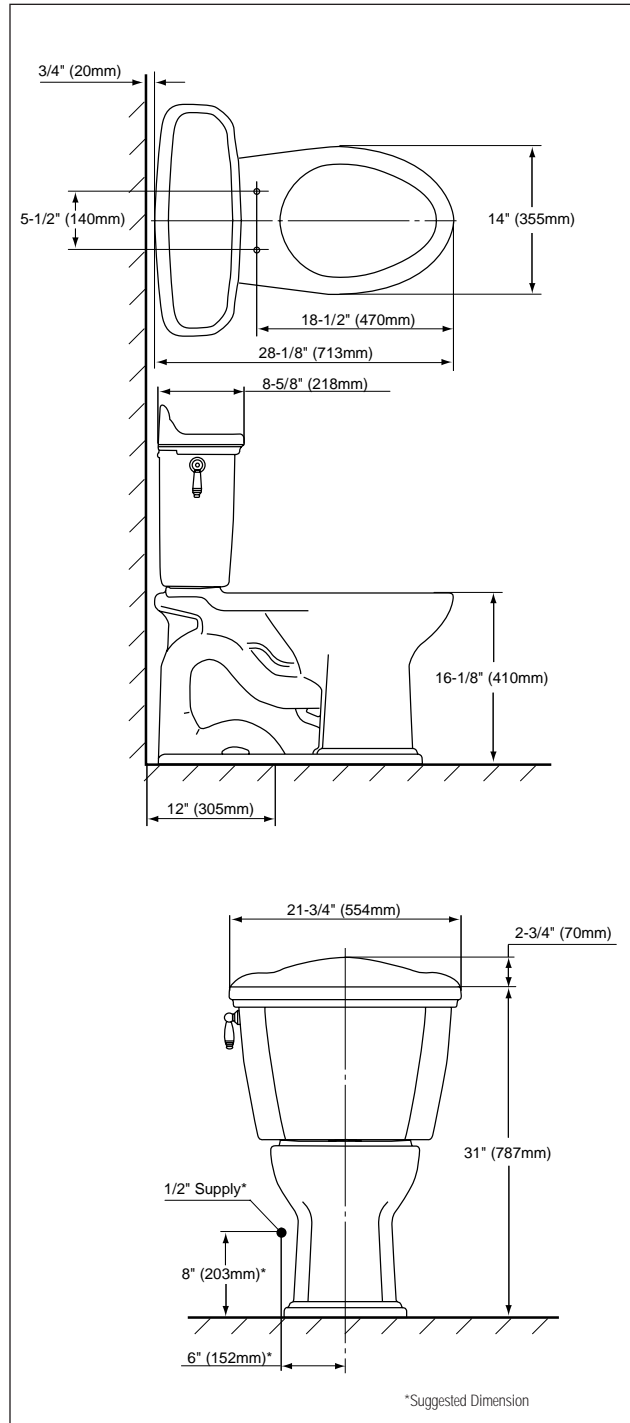

CST754SFN - Whitney™ Toilet

TOTO®

TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (888) 295-8134 • Fax. (770) 282-8701 • www.totousa.com

Printed in U.S.A. © TOTO LTD. 05/05 #A10240

Printed on recycled paper

REV 05/05