

DIAMETRIQUE WIDESPREAD LAVATORY FAUCET, MODEL 5128.801

- Contemporary styling
- Cast brass construction
- Quarter-turn washerless ceramic disc valve cartridges (reversible for use with cross handles)
- Includes all-metal pop-up drain assembly to accommodate European and US china, mounting kit, and coupling for installation on 6" to 12" (152mm to 305mm) centers, 1-1/4" dia. mounting holes
- Drain includes additional 13" pivot rod for vessel installations
- Coordinating accessories available
- Available in Chrome only





Maximum Flow Rate: 2.2 gpm (8.8 L/min.)
Low Lead: Meets NSF standard 61/Section 9 & Prop 65 lead requirements.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1
CSA B125
NSF 61/Section 9

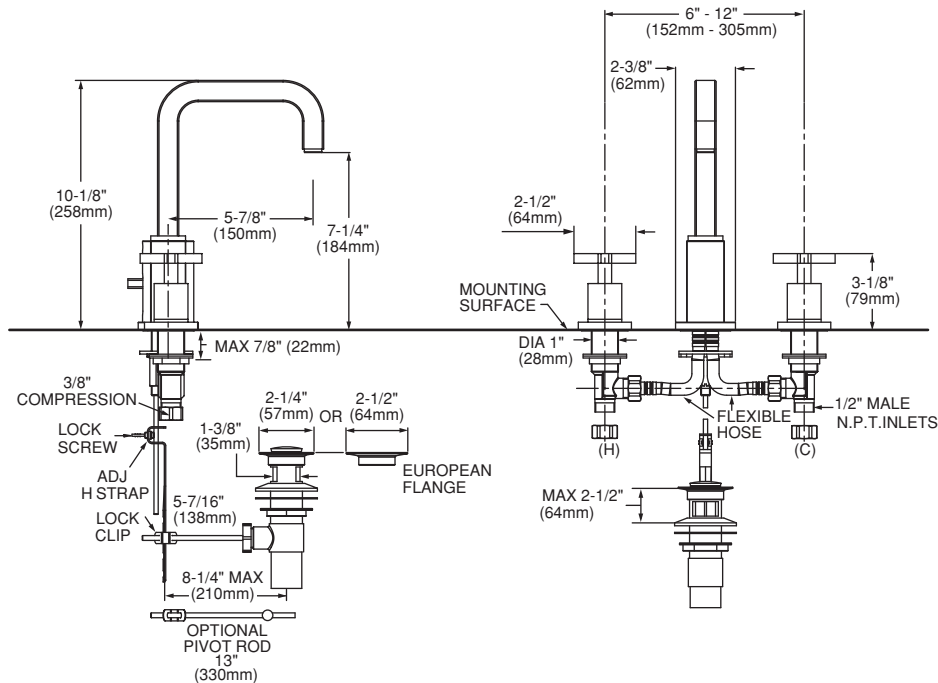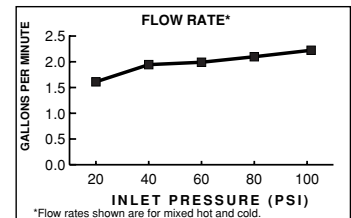

NOTE:

★ LIFT ROD CAN BE SHAPED TO ACCOMMODATE FAUCET-TO-DRAIN MOUNTING CENTERS UP TO 8" (203MM).